


YOKAS SLIDING DOOR SYSTEM

sezione tecnica

technical section - sección técnica

פרטים לדלת הזזה YOKAS

Ceiling fastening installation
Instalacion con fijación al techo

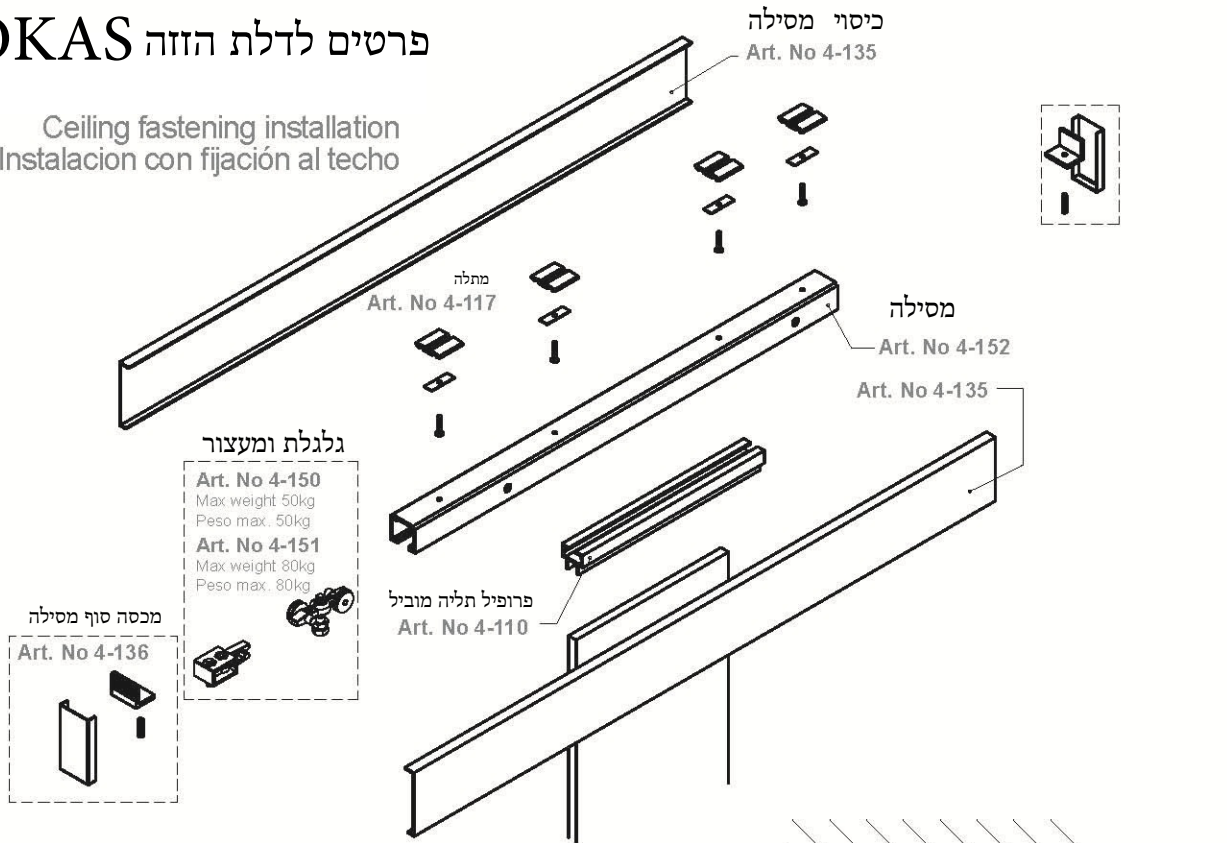

VITE / SCREW / TORNILLO
UNI EN ISO 7051-ST6.3X38-C-Z



Apply the bi-component glue LOXEAL 31-40 inside the aluminium profile channel using the pusher or an extruding gun provided separately. The operation requires around 25 ml/m of bi-component glue with an application time of around 2 min/m.

